

E-Z STACK PAD

Submittal Information

Part No. 18042S-18072BS
Document No. SPEC18042S
Date 2023-04-03
Revision 06

General Properties

- Material: PP (Polypropylene)
- Finish: Gray, Black
- Recommended temperature range: -25°F to 180°F
- Standard: ASTM D2299
- Application: Air conditioner outdoor units, Other lightweight equipment, etc.

Specification



Item No.	Nominal Size	Part Size (Inch.)					MAX Allowable Load	U/M	Pallet QTY
		A	B	C	D	E			
18042S	24"X24"X3"	23 5/8	25 13/16	23 5/8	25 13/16	3	820lbs	EA	68
18042BS	24"X24"X3"	23 5/8	25 13/16	23 5/8	25 13/16	3	820lbs	EA	68
18044S	30"X30"X3"	29 7/8	31 7/8	29 7/8	31 7/8	3	980lbs	EA	56
18044BS	30"X30"X3"	29 7/8	31 7/8	29 7/8	31 7/8	3	980lbs	EA	56
18046S	32"X32"X3"	31 7/8	33 5/8	31 7/8	33 5/8	3	1060 lbs	EA	53
18046BS	32"X32"X3"	31 7/8	33 5/8	31 7/8	33 5/8	3	1060 lbs	EA	53
18048S	36"X36"X3"	35 7/8	37 5/8	35 7/8	37 5/8	3	1160 lbs	EA	45
18048BS	36"X36"X3"	35 7/8	37 5/8	35 7/8	37 5/8	3	1160 lbs	EA	45
18049S	40"X40"X3"	39 7/8	42	39 7/8	42	3	1240 lbs	EA	42
18049BS	40"X40"X3"	39 7/8	42	39 7/8	42	3	1240 lbs	EA	42
18050S	18"X38"X3"	17 5/8	19 1/2	37 5/8	39 1/2	3	840 lbs	EA	90
18050BS	18"X38"X3"	17 5/8	19 1/2	37 5/8	39 1/2	3	840 lbs	EA	90
18052S	24"X36"X3"	35 7/8	38	23 5/8	25 1/2	3	980 lbs	EA	57
18052BS	24"X36"X3"	35 7/8	38	23 5/8	25 1/2	3	980 lbs	EA	57
18070S	24"X48"X3"	23 13/16	26	47 13/16	50	3	1160lbs	EA	49
18070BS	24"X48"X3"	23 13/16	26	47 13/16	50	3	1160lbs	EA	49
18072S	36"X48"X3"	47 7/8	50	35 7/8	38	3	1290 lbs	EA	38
18072BS	36"X48"X3"	47 7/8	50	35 7/8	38	3	1290 lbs	EA	38

Features

- The excellent one-piece structure design makes the bottom surface have more contact with the ground, making the product not easy to sink.
- Sturdy stiffener rib design enables the product to have better load-bearing performance, which can meet the needs of most air conditioners on the market.
- Nestable design reduces storage space and transportation costs.
- The special texture on the surface makes the product have a non-slip effect.
- Hole-free design prevents the equipment from operating normally due to weeds growing upwards.

Installation Tips

- When using this product outdoors, place it on a flat foundation of dirt or small gravel, to reduce the impact of vibration on the operation of the equipment.
- Although this product has flame-retardant properties, it is best to keep this product away from the open flame. Long-term exposure to the open flame will cause the product to deform and affect the function of the product.

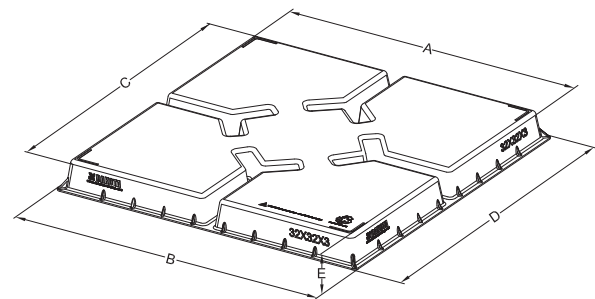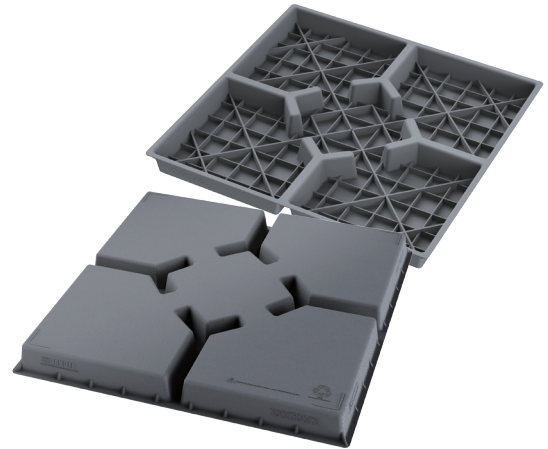

PATENT PENDING