

YELLOW COATED GAS CONNECTORS

Submittal Information

Part No 12453-12472
 Document No. SPEC12453
 Date 2022-07-25
 Revision 02

General Properties


Material: Stainless Steel 304
 Color: Yellow/Stainless Steel
 Finish: Yellow epoxy coating
 Fitting: Zinc-Plated Steel S45C
 Rated Pressure: 0.5 PSI
 Rated Operating Temperature: -40°F to 150°F
 Certificate: CSA Listed for US and Canada.

Installation Tips

- The connector nuts must not be connected directly to pipe threads.
- The connector shall not be used if kinked, twisted or bent smaller than 1 1/2 inch internal diameter.
- This connector must be installed with adapter provided.

Features

- Gas dryer and water heater connector.
- The yellow coating provides extra corrosion protection from accidental contact with common household chemicals.
- The connector is rated for use in the temperature range of -40°F to 150°F and can be used up to a pressure of 0.5 PSI.
- Configured with pipe threaded fittings for installation.
- Metal to metal seal ensures safe, leak free performance.

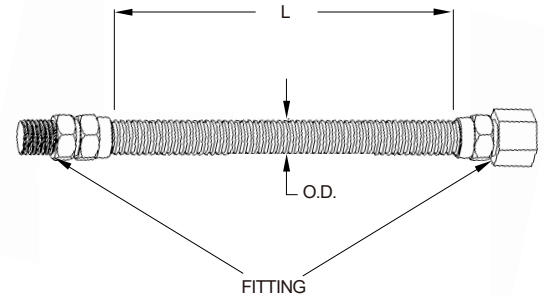

Item No.	LENGTH	O.D.	FITTING	Flow Capacity(NG)
12453	12"	1/2"	1/2F x 1/2M	102,000 BTU/H
12454	18"	1/2"	1/2F x 1/2M	93,100 BTU/H
12455	24"	1/2"	1/2F x 1/2M	85,000 BTU/H
12456	36"	1/2"	1/2F x 1/2M	71,100 BTU/H
12457	48"	1/2"	1/2F x 1/2M	60,500 BTU/H
12458	12"	5/8"	1/2F x 1/2M	180,000 BTU/H
12459	18"	5/8"	1/2F x 1/2M	164,200 BTU/H
12460	24"	5/8"	1/2F x 1/2M	150,000 BTU/H
12461	36"	5/8"	1/2F x 1/2M	125,000 BTU/H
12462	48"	5/8"	1/2F x 1/2M	106,000 BTU/H
12463	12"	5/8"	1/2F x 1/2F	180,000 BTU/H
12464	18"	5/8"	1/2F x 1/2F	164,200 BTU/H
12465	24"	5/8"	1/2F x 1/2F	150,000 BTU/H
12466	36"	5/8"	1/2F x 1/2F	125,000 BTU/H
12467	48"	5/8"	1/2F x 1/2F	106,000 BTU/H
12468	12"	5/8"	1/2M x 1/2M	180,000 BTU/H
12469	18"	5/8"	1/2M x 1/2M	164,200 BTU/H
12470	24"	5/8"	1/2M x 1/2M	150,000 BTU/H
12471	36"	5/8"	1/2M x 1/2M	125,000 BTU/H
12472	48"	5/8"	1/2M x 1/2M	106,000 BTU/H