

## CONDENSATE PUMPS

### Submittal Information

Part No	18221-18231
Document No.	SPEC18221
Date	2021-11-01
Revision	02

### General Properties

- 115V or 230V, 60Hz
- Head capacity: 15' or 20'
- 1/2 gallon rustproof, high impact ABS tank capacity
- Rated for water temperature up to 140°F(60°C)
- Thermal overload protection
- Safety switch
- Stainless steel motor shaft
- 6' power cord with 3-pronged plug
- UL/CUL certification

### Applications

Condensate removal for HVAC/R equipment.

### Purpose

This product is designed to automatically evacuate condensate or water discharge from HVAC/R equipment up to 22' vertically once the condensate in the reservoir reaches a specified level.

### Specification

Item No.	Specifications	U/M	Std. Pkg.
18221	115V, 1/2 GAL, 1/50 HP, 15' MAX LIFT W/SWITCH	EA	1
18222	115V, 1/2 GAL, 1/50 HP, 20' MAX LIFT W/SWITCH	EA	1
18231	230V, 1/2 GAL, 1/50 HP, 17' MAX LIFT W/SWITCH	EA	1

### Features


- High startup safety. Two terminals are provided allowing the installer flexibility to connect air-handler shut-down.
- Fully automatic, easy installation. Utilizing the same great features but in a low-height design, is great for tight spaces.
- Shaft seal with long service life and low friction loss.
- Float switch can be integrated.
- Reversible tank cover with 3 inlet drain holes for flexible installation.




### Product Specifications

Item No.	Volts	Shut-Off	Hertz	Cord	Check	Dimensions(inches)		
						Height	Length	Width
18221	115	15	60	6	3/8"	7.2	11.4	5.5
18222	115	20	60	6	3/8"	7.2	11.4	5.5
18231	230	17	50/60	6	3/8"	7.2	11.4	5.5

20' liter per hour

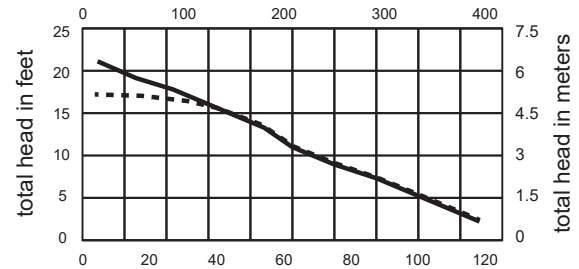

15' liter per hour

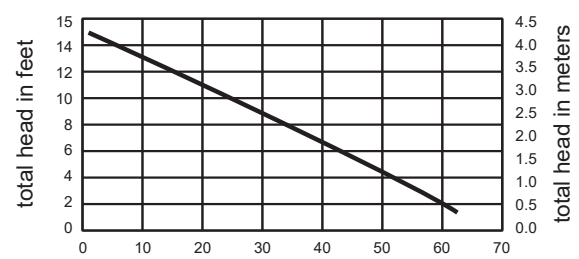

gallons per hour  
 — 115 volt, 60Hz    ···· 230 volt, 60Hz