


proguys

MINI-SPLIT CONDENSATE PUMPS



*Efficient, Reliable,
and Built to Last.*

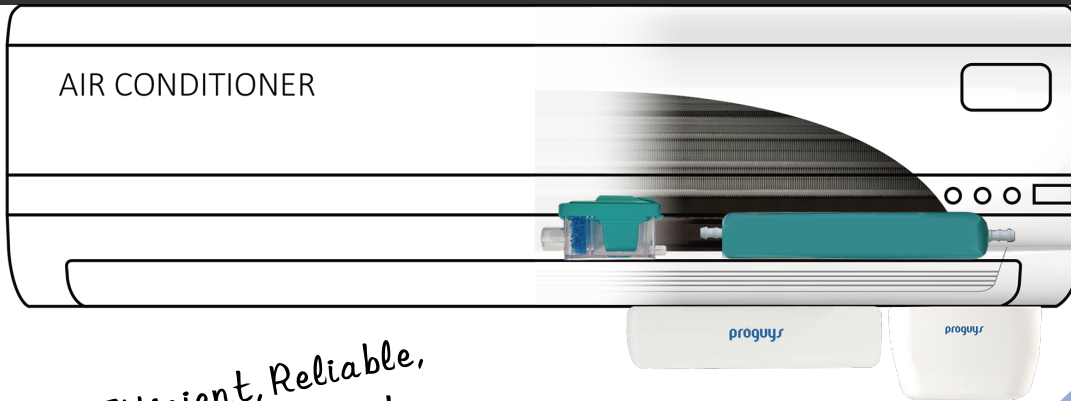

Low Noise



Durability



Large Flow



Easy
Assembly



Convenient
Cleaning

Z SERIES MINI-SPLIT CONDENSATE PUMP



| Item No. | Specifications | U/M | Ctn. Qty. |
|----------|---|-----|-----------|
| 18101 | Z20 Mini-Split Pump, Industrial Sensor, Dual Vol, 5.3 GPH | CS | 20 |

| Item No. | Specifications | U/M | Ctn. Qty. |
|----------|--|-----|-----------|
| 18102 | Z40 Mini-Split Pump, Industrial Sensor, Dual Vol, 10.6 GPH | CS | 20 |

| Item No. | Specifications | U/M | Ctn. Qty. |
|----------|---|-----|-----------|
| 18103 | Z40H Mini-Split Pump, Industrial Sensor, Dual Vol, 10.6 GPH | CS | 40 |

- Power supply: 100-240V AC 50/60Hz <4W
- Max.suction lift: 2m (6.56 ft)
- Max.water temperature: 40°C (104°F)
- Discharge tube: 6mm (1/4 in) ID
- Class: II appliance
- Protection: Fully potted, IP-45





18101



18102



18103

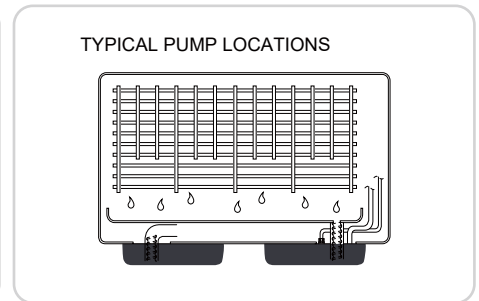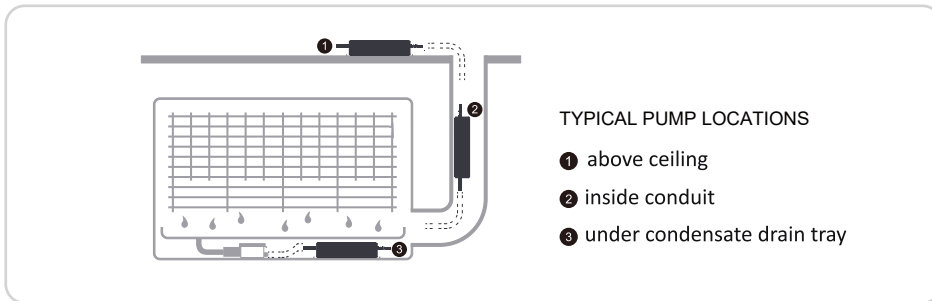

FEATURES

- Operates with low noise for a quiet environment.
- Features safe and reliable water detection using a capacitive sensor.
- Offers large flow capacity for efficient condensate drainage.
- Automatic flow adjustment reduces noise and extends pump lifespan.
- Designed for easy cleaning and maintenance.
- Function Key (Fn) lets you quickly restore factory settings or adjust water level parameters, streamlining maintenance and setup.

X SERIES MINI-SPLIT CONDENSATE PUMP





| Item No. | Specifications | U/M | Ctn. Qty. |
|----------|--|-----|-----------|
| 18121 | X15 Mini-Split Pump, Dual Vol, 3.9 GPH | CS | 20 |

| Item No. | Specifications | U/M | Ctn. Qty. |
|----------|---|-----|-----------|
| 18122 | X40 Mini-Split Pump, Dual Vol, 10.6 GPH | CS | 20 |

| Item No. | Specifications | U/M | Ctn. Qty. |
|----------|--|-----|-----------|
| 18123 | X40H Mini-Split Pump, Dual Vol, 10.6 GPH | CS | 20 |

- Power supply: 100-240V AC 50/60Hz <4W
- Sound level: <19dB(A) @ 1m (3.28 ft)
- Max.recommended head: 20m (65.62 ft)
- Safety switch: 3A Normally closed
- Max.water temperature: 70°C (158°F)
- Discharge tube: 6mm (1/4 in) ID
- Class: II appliance
- Rated: Continuous
- IP Protection: IPX5
- Fully potted: ✓

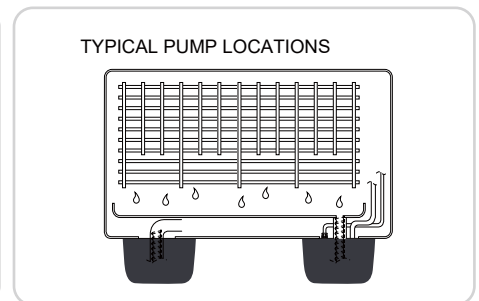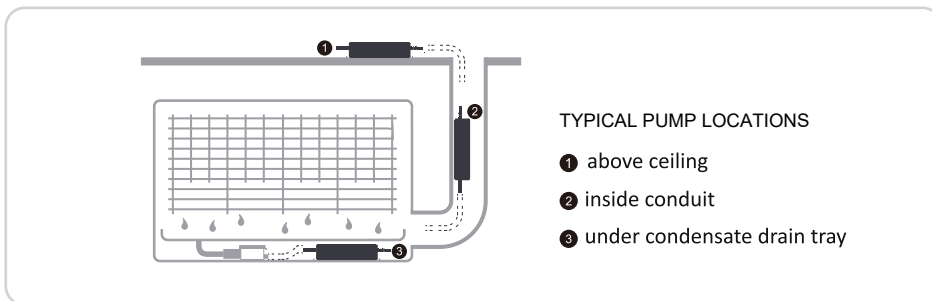

FEATURES

- Safety and reliability.
- Operates with a float switch to detect water presence.
- Provides powerful drainage of condensate water.
- Ensures silent operation for a peaceful environment.
- Typically installed below mini splits for efficient operation.

MINI-SPLIT CONDENSATE PUMP RELATED PRODUCTS



CONDENSATE REMOVAL PUMP *HOT*

NO. 18221-18231



SECONDARY OVERFLOW SWITCHES *NEW*

NO. 50001-50003




PLASTIC CONDENSATE DRAIN PANS *HOT*

NO. 18001-18017



3/4" SCH-40 PVC PIPE *NEW*

NO. 12445

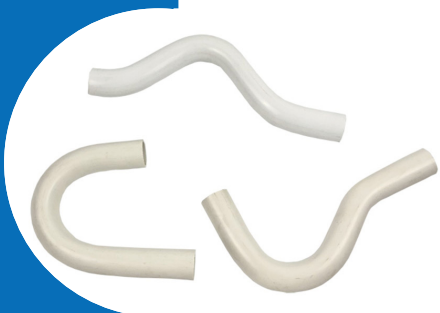

PVC TRAPS

NO. 12415-12419