

## CONDENSATE REMOVAL PUMP

### Submittal Information

Part No	18221-18231
Document No.	SPEC18221
Date	2025-05-13
Revision	04

### General Properties

- 115V or 230V, 60Hz
- Head capacity: 15' or 20'
- 1/2 gallon rustproof, high impact ABS tank capacity
- Rated for water temperature up to 140°F(60°C)
- Thermal overload protection
- Safety switch
- Stainless steel motor shaft
- 6' power cord with 3-pronged plug

### Applications

Condensate removal for HVAC/R equipment.

### Purpose


This product is designed to automatically evacuate condensate or water discharge from HVAC/R equipment up to 22' vertically once the condensate in the reservoir reaches a specified level.

### Specification

Item No.	Specifications	U/M	Std. Pkg.
18221	115V, 1/2 GAL, 1/50 HP, 15' MAX LIFT W/SWITCH	EA	1
18222	115V, 1/2 GAL, 1/50 HP, 20' MAX LIFT W/SWITCH	EA	1
18231	230V, 1/2 GAL, 1/50 HP, 20' MAX LIFT W/SWITCH	EA	1

### Features

- High startup safety with flexible air-handler shutdown connection.
- Fully automatic and easy to install, suitable for tight spaces.
- Long-lasting shaft seal with low friction loss.
- Optional integrated float switch.
- Reversible tank cover with 3 inlet drain holes for flexible installation.

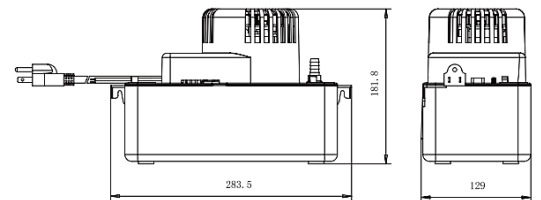

• 283.5mm=11.16 in    • 181.8mm=7.16 in    • 129mm=5.08 in

### Product Specifications

Item No.	Volts	Shut-Off	Hertz	Cord	Check	Dimensions		
						Height	Length	Width
18221	115	15'	60	6	3/8"	7.2"	11.4"	5.5"
18222	115	20'	60	6	3/8"	7.2"	11.4"	5.5"
18231	230	20'	50/60	6	3/8"	7.2"	11.4"	5.5"

