


Z40H Mini-Split Pump

No. 18103

Performance Data

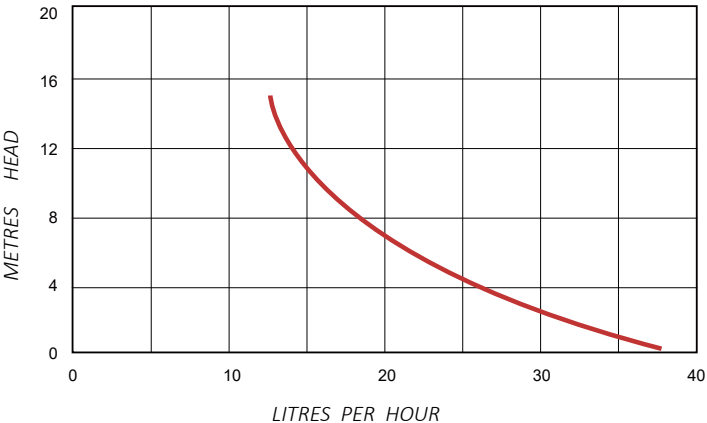

- Power supply: 100-240V AC 50/60Hz <4W
- Max.flow: 40L(10.57 gal)/H, range from 20-40L(5.28-10.57 gal)/H
- Max.recommended head: 20m (65.62 ft)
- Max.suction lift: 2m (6.56 ft)
- Max.unit output: 46 KW / 157,000 Btu/h
- Max.water temperature: 40°C (104°F)
- Discharge tube: 6mm (1/4 in) ID
- Class: II appliance
- Protection: Fully potted, IP-45

1 IN THE BOX

1A fuse	x 1
Installation screw	x 2
Expansion plug	x 2
Level gauge	x 1
Connection clamp	x 1
Nylon clamps 8 in x 5/32 in	x 2
Drilling schematic template	x 1
Anti-siphon valve	x 1

2 INSTALLATION

1.

2.

3.

4.

2 INSTALLATION

5.

6.



7.

2 INSTALLATION

8.


③ FUNCTION

The pump's flow rate automatically adjusts with changes in water level.

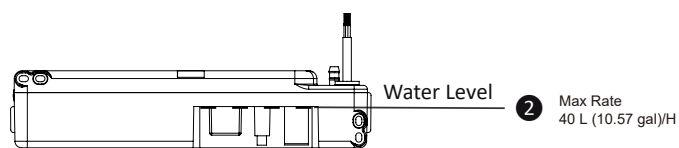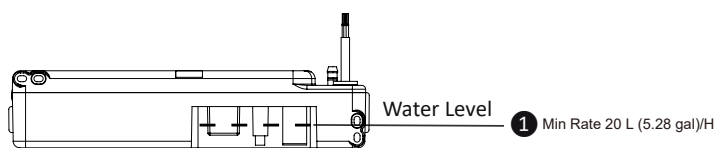


Ⓜ for Manual drainage.

④ INSTALLATION

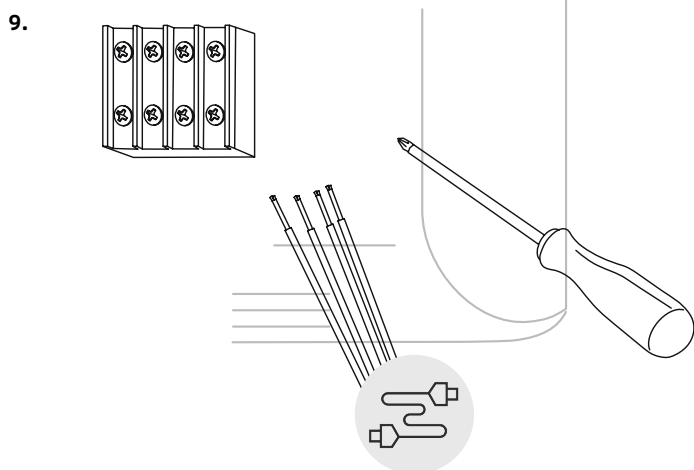


④ INSTALLATION

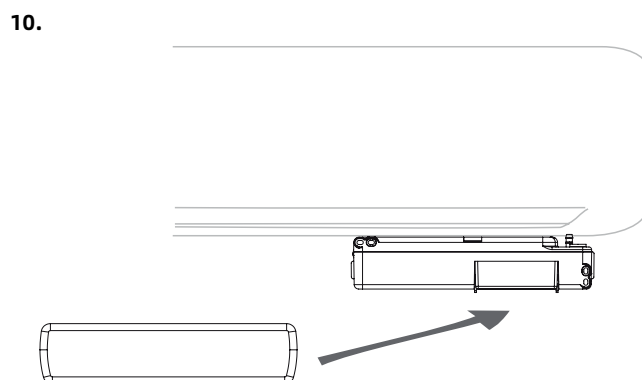


④ INSTALLATION


(1) Signal-line connection

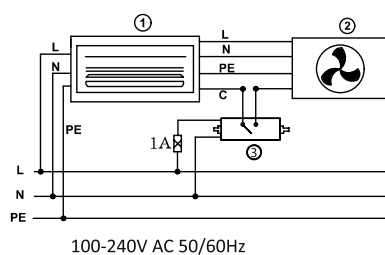

(2) Strong electric control connection (current <3A)

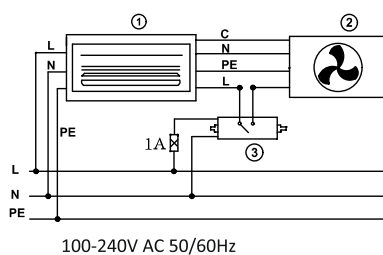

(3) Strong electric control connection (current >3A)

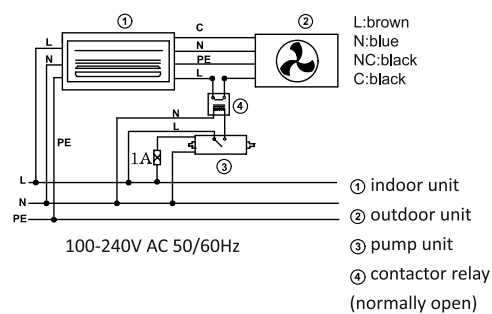

⑤ SAFETY INSTRUCTIONS

⚠ Read instructions carefully before attempting to install, operate or service. pump installation, connections or any other service should be done by qualified engineers.

This pump has not been investigated for use in swimming pool or marine areas.

Do not install or use the pump if the supply cord or pump itself is broken.

The MINI-SPLIT PUMP has been evaluated for use with water only.

⚠ Ensure the pump is disconnected from the mains supply before carrying out any adjustments or servicing

🏠 Suitable for indoor use only