

METAL DISCONNECT SWITCHES

Submittal Information

Part No 15539-15541P
 Document No. SPEC15539
 Date 2026-04-30
 Revision 05

General Properties


Material: Steel
 Rating: 30 A / 60 A
 Coil voltage: 120 V / 240 V
 Types: Non-Fused Metallic Disconnect
 Fused Metallic Disconnect
 Color: Gray
 Phase: 1 phase and 3 phases
 Usage: Outdoor
 Certificate: UL Listed (cULus)

Applications

- Air Conditioners
- Heat Pumps
- Water Heaters
- Swimming Pools

Features

- Fusible and non-fusible combination wall-mounted power sockets can be easily and safely disconnected from the power supply as required.
- The clearly visible ON / OFF label eliminates guesswork and provides a clean, modern look.
- UL Listed (cULus), NEMA type 3R enclosure for outdoor use.
- Efficient and space-saving enclosure with unobstructed wiring troughs and easy removal of the lid and interior.
- Knockouts on back, bottom and sides offer a variety of configurations.
- The pull-out handle can store the "OFF" position in the compartment, helping to prevent the handle from being misplaced.
- Protective shield cannot be removed until the pullout handle is removed, disconnecting the power.

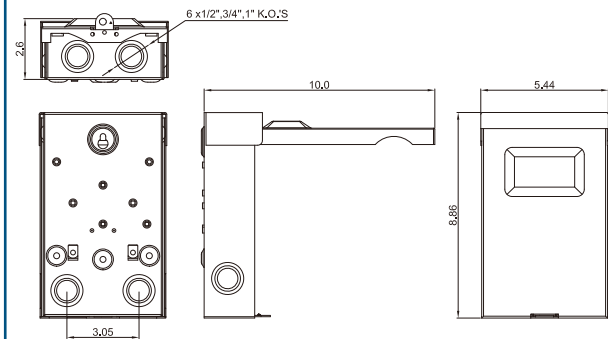

Product Structure

Item No.	Specifications	U/M	Std. Pkg.
15539	60A Non-Fused Metallic Disconnect	EA	6
15539P	60A Non-Fused Metallic Disconnect, 576/PK	PK	1
15540	30A Fused Metallic Disconnect	EA	6
15540P	30A Fused Metallic Disconnect, 576/PK	PK	1
15541	60A Fused Metallic Disconnect	EA	6
15541P	60A Fused Metallic Disconnect, 576/PK	PK	1

Horsepower Rating:

30A (15540)

- 120V: Standard 0.5 HP, Max 2 HP
- 240V: Standard 1.5 HP, Max 3 HP

60A (15539, 15541)

- 120V: Standard 1.5 HP, Max 3 HP
- 240V: Standard 3 HP, Max 10 HP